



# weBoost Installed | Office 200

SKU: 473047    MAP: \$3,799.99

## FEATURES

- Best-in-class amplifier system for small-to-medium businesses and warehouses
- Covers 15,000 to 35,000 square feet
- Includes professional installation anywhere in the US
- Comes with 2 inside antennas for more complete coverage
- Is FCC approved and works on all U.S. carrier networks, including Verizon, AT&T, Sprint, T-Mobile, UScellular, and more



PROFESSIONAL INSTALLATION INCLUDED

5G COMPATIBLE

## About

Resolve cell signal issues with a quick, turnkey solution that includes complete, professional installation. **The weBoost | Installed Office 200** is our best-in-class amplifier solution, designed for small-to-medium businesses and warehouses. It comes with two low-profile antennas for optimal cell signal coverage throughout a commercial space. weBoost Installed | Office 200 is 5G compatible and improves cell signal on all U.S. carrier networks, including Verizon, AT&T, Sprint, T-Mobile, UScellular and others. weBoost Installed | Office 200 also comes with an industry-leading 3-year manufacturer's warranty and a 30-day money-back guarantee.

## Kit Includes



Professional Installation



Office 200



Outside Omni Plus (314423)



2x Low Profile Dome (314407)



Power Supply (850026)



2-Way Splitter (850034)


\*Cables will be provided by installer

## Specifications

SKU NUMBER	473047*	
FREQUENCIES	Band 12/17	700 MHz
	Band 13	700 MHz
	Band 5	850 MHz
	Band 4	1700/2100 MHz
	Band 25/2	1900 MHz
MAX GAIN	72 dB	
IMPEDANCE	75 Ohm	
POWER	110-240V AC, 50-60 Hz, 20 W	
CONNECTORS	F-Female	
BOOSTER DIMENSIONS	14.25 x 10.75 x 2.25 in	
BOOSTER WEIGHT	7.7 lbs	

\* **WARNING:** This product can expose you to chemicals including Nickel, which is known to the State of California to cause cancer, and Bisphenol A, which is known to the State of California to cause birth defects or other reproductive harm. For more information go to [P65Warnings.ca.gov](http://P65Warnings.ca.gov)


## How It Works

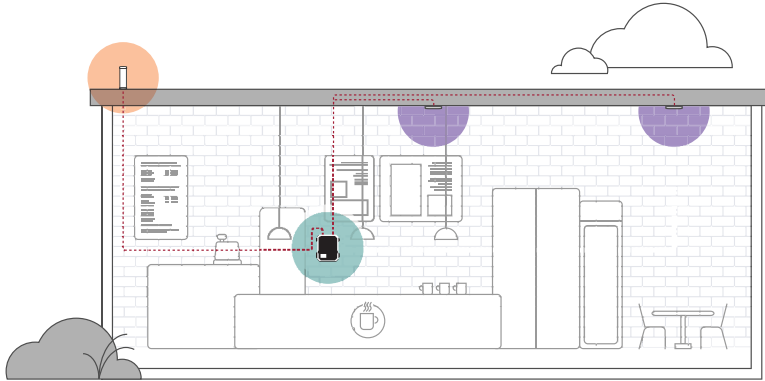


- 1 Outside antenna:** The outside antenna communicates back and forth with nearby cell towers.
- 2 Booster:** The booster amplifies any cell signals it receives from the outside antenna.
- 3 Inside antennas:** The inside antennas broadcast these signals for use throughout your business.

## Package Dimensions (Approx.)

20 L x 16 W x 14 H



FRONT



SIDE




TOP/BOTTOM



WEIGHT

**MASTER CARTON:** 20 L x 16 W x 14 H | 15.2 Lbs. | Qty 1

FOR PARTNER'S USE

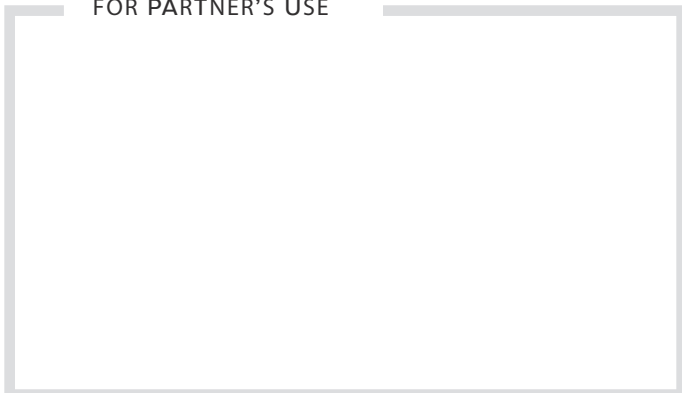

473047\_weBoost Installed | Office 200\_SS\_062321

## Support



3-Year Warranty from Purchase.

**Website:** <https://www.signalbooster.com>

**Phone:** +1 855 846 2654  
Monday to Saturday



## UPC

